



Contact Side
Stiffener
0.3±0.05

5.9±0.2

4.9



SCALE 100:1

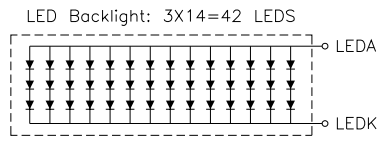

- Notes:
1. 10.4" Transmissive, Normally-White TFT LCD
 2. View Direction: 6:00
 3. Interface: 24-Bit Parallel RGB
 4. Operation Temp.: -10°C to 50°C
 5. Storage Temp.: -20°C to 70°C
 6. VDD=3.0V to 3.6V

PIN	SYMBOL
1	GND
2	AVDD
3	VCC
4	R0
5	R1
6	R2
7	R3
8	R4
9	R5
10	R6
11	R7
12	G0
13	G1
14	G2
15	G3
16	G4
17	G5
18	G6
19	G7
20	B0
21	B1
22	B2
23	B3
24	B4
25	B5
26	B6
27	B7
28	DCLK
29	DE
30	HSYNC
31	VSYNC
32	MODE
33-35	NC
36	VCC
37	NC
38	GND
39	GND
40	AVDD
41	VCOM
42	DITHB
43	NC
44	VCOM
45-55	NC
56	VGH
57	VCC
58	VGL
59	GND
60	NC

LT104A-01A

DWN.	LYJ	TITLE	LCM OUTLINE DIMENSION
CHK.	LY	PART NO.	LT0104A-01A
APPD.		DWG. NO.	LT104A-01A-WXA
REV.	A	UNIT	mm PROJECTION
DATE	2018.12.06	SCALE	NTS SHEET 1 OF 1